



FOR SIMULTANEOUS CONTROL OF STEAM BATH AND SAUNA

Also available as integrated version.





Condair Spa Control Delta

The innovative spa control for simultaneous control of steam bath, caldarium, rasul and different sauna variants such as bio and fin sauna.

It is possible to control various accessories such as light, fragrance, fan, freely configurable relay. It enables managing a steam bath and a fin sauna simultaneously and independently of each other with the same display. Operation is via a modern touch display, which is available in various versions.

Customisable display, you can upload your logo to appear on the screen.

Advantages:

- The controller can control a steam bath and a sauna simultaneously and independently of each other.
- Easy switch between steam bath and sauna on the display.
- Flexible number of displays, one for both cabins or one for each cabin.

- Integrated web server where device settings can be managed.
- Smart Home connection via optional KNX gateway, Modbus integrated as standard.
- Keepwarm function saves energy

External Touch Display

Optionally a remote touch display can be connected to the Omega steam generator.

It is available as flush-mounted or wall-mounted version, with only 19-mm wall outstanding. You have the choice from three standard frames: brushed stainless steel, white or black glass. There are two different display layouts matching to the selected cover.


The cleverly designed magnetic frame construction, however, also allows steam bath builders to individualize the fitting with a material of the customer's liking.

The external display in three versions



The following connections are possible:

- 2 x Fan
- 2 x Light
- 2 x Fragrance pump 230 V
- 2 x Potential-free relay contact
- 2 x Start-/Stop button
- 2 x Temperature sensor (KTY,PT1000,PT100)
- 1 x Emergency stop
- 1 x Humidity sensor
- 1 x Bench heating
- 1 x Wall heating
- 1 x Sauna stove up to 9KW (option)
- 1 x Transformer (option)

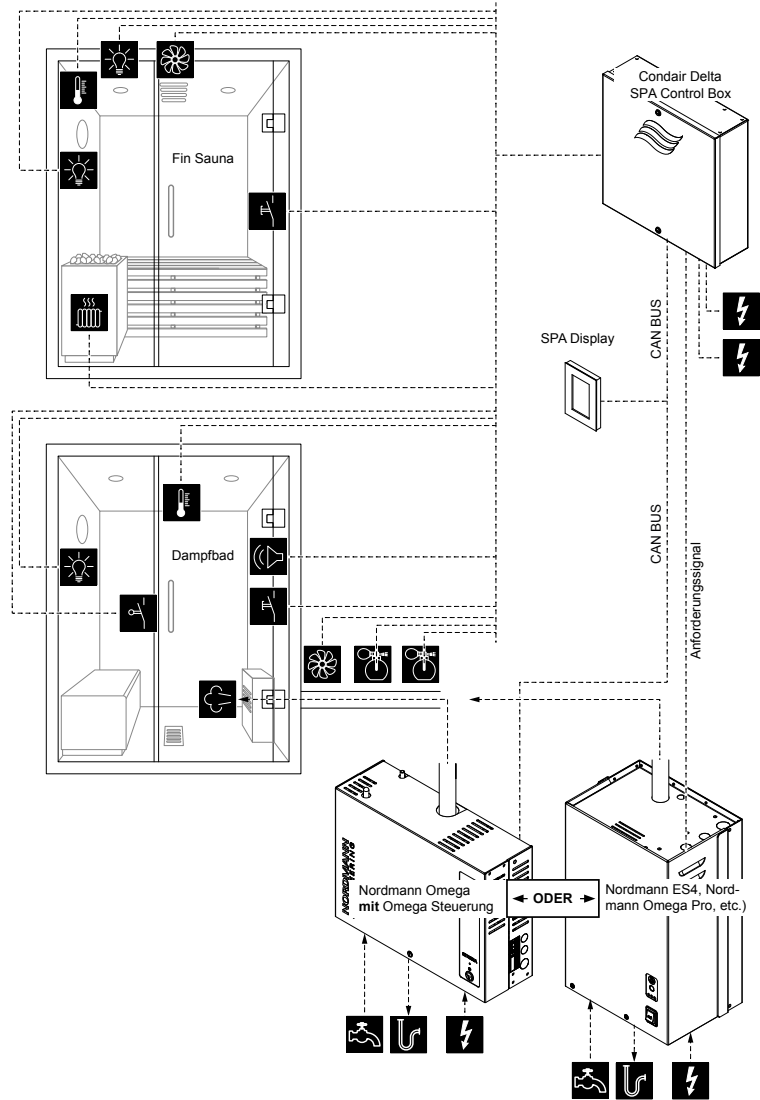

Technical data

| Condair Spa Control Delta Box | | |
|-------------------------------|--------------------|-----------|
| Nominal power | Sauna | max. 9 kW |
| | Benchheating | 1 kW |
| | Wallheating | 1 kW |
| | Accessoires | 1 kW |
| Dimensions (W x H x D) | 353 x 353 x 107 mm | |
| Net weight | 5,5 kg | |
| Control voltage | 230 V | |
| Heating voltage | 400 V | |
| Type of protection | IPX4 | |

| Application | Variant |
|--|---|
| Steambath | standard |
| Steambath with benchheating | Benchheating |
| Caldarium | Bench and wallheating |
| Rasul | Bench and wallheating |
| Finnsauna | Finnsauna |
| Bio sauna for sauna heater with integrated steamer | Bio sauna (generator and Spa Control Delta) |
| Bio sauna for pure sauna heater, steam produced by ES4-2 | Fin sauna |
| Dual cabin | Fin sauna |